



**BrewZilla 100L – Gen 4  
Instruction Manual**

**KegLand Distribution PTY LTD**

**[www.KegLand.com.au](http://www.KegLand.com.au)**



## Contents

WARNINGS - IMPORTANT INFORMATION!	4
Parts Checklist	5
Power Requirements and Wiring	6
Digital Temperature Controller Button Layout	7
Registering your BrewZilla to the RAPT Portal	8
1. Sign up for a RAPT Account	8
2. Connect your BrewZilla to your Wi-Fi network	8
3. Register your BrewZilla to your Account on the RAPT Cloud	9
Remote Operation via the RAPT Portal	9
Digital Controller Assembly	10
Adjusting the Angle of the Digital Controller	10
Perforated False Bottom Assembly and Installation	11
Boiler Assembly	12
Tap Assembly and Installation	12
Plumbing to Tee to the Tap before the 25W Pump	14
Malt Pipe Assembly	16
Fitting the Malt Pipe Handle	17
Operation of the BrewZilla using the Digital Controller	19
Enable/Disable Graph	19
Adjusting Target Temperature	19
Turning the Pump On/Off	19
Adjusting the Pump Duty Cycle (Percentage)	19
Adjusting the heating power	20
Mashing	21
Recirculation Arm Assembly	22
Mash Temperature Reading	23
Sparging	24
Boiling	26
Boil Temperature Reading	26



Cooling .....	26
Hot Cubing .....	26
Cleaning .....	27
Cleaning after brew day .....	27
Pump Cleaning and Maintenance .....	28
Troubleshooting Registration and Telemetry .....	29
This Device Is Not Recognised Error.....	29
No telemetry is being displayed on the RAPT Portal. ....	29
Determine whether your BrewZilla is connected to Wi-Fi and check the signal strength .....	29
Re-register your BrewZilla Controller.....	29
The BrewZilla Controller has been sending telemetry but is no longer sending telemetry.....	30
Updating Firmware .....	30
Temperature Probe Calibration .....	31
PID Temperature Control.....	31
Display Icons Legend.....	32
Profiles .....	32
Menus .....	34
Register Device.....	34
Start Profile/Profile Control .....	34
Settings.....	35
Bluetooth .....	36
Diagnostics.....	37
Recommended Accessories .....	38
Distillation Accessories .....	46
Support .....	48
Warranty (Australia) .....	48



## WARNINGS - IMPORTANT INFORMATION!

1. Please read this ENTIRE instruction sheet before using the BrewZilla unit. If you are unsure about any part of using this brewery, please refer to the YouTube videos that we have made or contact your local distributor.
2. If the BrewZilla is damaged in any way do not use it. Contact your local distributor.
3. NEVER turn on the pump or energise the device without the recirculation arm securely connected. If you do not fit this arm, you could be at risk of spraying hot wort into the air causing injury.
4. Do not run the pump dry for extended periods. This can damage the pump.
5. Do not use the lid clamps on the glass lid. This is only for metal distillation lids.
6. NEVER lift the BrewZilla when it is completely full, we strongly urge you to use a hose to fill your unit. Use the pump or ball valve to transfer your wort. Lifting a heavy / hot BrewZilla may result in serious injury.
7. If at any stage the recirculation arm is not fitted and/or needs to be removed always ensure the ball valve is turned off. See the [recirculation arm assembly](#) section.
8. Do not boil dry. Do not energise the device or begin a profile from the RAPT Portal if there is less than 20 litres of liquid in the boiler. This is the minimum fill level.
9. NEVER direct a garden hose or mains water down the pump inlet or recirculation pipe as you risk rupturing the silicone hosing on the underside of the brewery.
10. Use only the recommended cleaners and sanitiser products listed in the [recommended accessories](#) section. Using chemicals not tested or recommended on the BrewZilla can result in permanent damage and void warranty. If you require further assistance with chemical compatibility please contact [beer@kegland.com.au](mailto:beer@kegland.com.au)



## Parts Checklist

- Main 100L BrewZilla Gen 4 Unit with Pump**
- Reinforced False Bottom Assembly
- Ball Valve Assembly
- 32A Single Phase Boiler Power Cable
- Glass lid with recirculation hole**
- 2 x Stainless Steel Lid Handles
- Male Camlock Recirculation Arm Extension**
- White camlock silicone washer for female Camlock
- Silicone hose for recirculation arm
- Malt Pipe Assembly**
- Malt Pipe Body
- Malt Pipe Handle
- Malt Pipe reinforced bottom screen (no hole and no seal required)
- Malt Pipe reinforced top screen with hole (no seal required)
- BrewZilla Gen 4 RAPT Wi-Fi Controller**
- 8 pin power cable for BrewZilla Wi-Fi controller



## Power Requirements and Wiring

The BrewZilla 100L has three heating elements that are concealed and integrated into the base of the brewery. These three elements are approximately 2200watts each meaning the total heating capacity of the brewery is 6600watts.

It is supplied as standard with a plug that suits a 32A Single Phase (220-240V AC) power source. This single-phase plug is commonly used for electric ovens or electric hob cooktops that you often see in your kitchen.

If your property has three phase power available you may find it favourable to run the brewery on three phases so you are not putting excessive load onto a single phase at your property and split the load over all three phases evenly.

To do this conversion a qualified electrician can convert the brewery from single phase to three phase by following the instructions below:

[https://www.kegland.com.au/cdn/shop/files/BrewZilla\\_100L\\_-\\_Convert\\_Single\\_Phase\\_to\\_Three\\_Phase\\_Manual.pdf?v=15567363929689533849](https://www.kegland.com.au/cdn/shop/files/BrewZilla_100L_-_Convert_Single_Phase_to_Three_Phase_Manual.pdf?v=15567363929689533849)

### Out of the box care instructions:

This unit requires cleaning before use to remove any machining oils or factory residue.

Dissolve 2-3 scoops KL07405 [StellarOxy](#) at 80°C (176°F) for 15 minutes in around 20L water. Use a mash paddle to stir the liquid and circulate using the pump. Once the unit is at a temperature that is tolerable to touch, use a set of heavy-duty brewing gloves and a microfibre towel to wipe down the internal surfaces. This includes the malt pipe and false bottom pieces.

This will wash away any left-over machining oils that could still be present.

The 100L Gen 4.0 BrewZilla is the biggest single vessel brewery which is brought to you by KegLand. It is a complete all in one, all grain home brewing system for those who want to take the leap to making batches up to 90L or simply want to upgrade their system allowing them full control of their batch from start to finish using Wi-Fi connectivity.

The Gen 4.0 BrewZilla can be used with no Wi-Fi connection using the detachable controller allowing temperature steps to be set and the pump operated manually through the

controller. However, to utilise the full range of functions of the Gen 4.0 BrewZilla we would suggest connecting your controller to your Wi-Fi and registering it on the RAPT Portal.

This portal allows you to track, record and monitor your brews online and control your brewery remotely through a Wi-Fi connected device.

The RAPT Portal gives you complete remote control over your brewery and makes the whole brewing process easier with the ability to pre-heat your strike water remotely or set up push notifications for hop or adjunct additions, no more phone timers or hand written notes. Everything controlled and logged easily through the portal.

Registering your BrewZilla Gen 4.0 to the RAPT Portal is quick and easy and requires the steps below to be followed. If you intend to only use the controller manually skip ahead to the [assembly instructions](#).

### Digital Temperature Controller Button Layout





## Registering your BrewZilla to the RAPT Portal

To utilise the Wi-Fi connectivity of the BrewZilla RAPT controller you will need to sign up for an account on the RAPT Portal. This will allow you to import recipes from the RAPT portal directly on to your BrewZilla RAPT controller and control the BrewZilla directly from the RAPT portal using your Wi-Fi enabled device.

### 1. Sign up for a RAPT Account

1. Sign up for an account on the RAPT Portal at the following address:

<https://app.rapt.io/>

2. Once signed up log in to your account on the RAPT Portal

### 2. Connect your BrewZilla to your Wi-Fi network

1. Plug your BrewZilla Gen 4.0 boiler into power using the supplied detachable 240V plug power cable.
2. Plug your BrewZilla Wi-Fi controller into the boiler using the provided 8-pin power cable.
3. On your smart phone or tablet, open your Wi-Fi settings and connect to the Kegland RAPT Wi-Fi Access Point using the Wi-Fi name and password displayed on the BrewZilla Wi-Fi controller.
4. Your smart phone or tablet should provide a prompt to sign into the network of your BrewZilla when you connect to its Wi-Fi Network. Clicking on this prompt will open the RAPT Captive Portal.  
If you are not prompted to sign into the network of your BrewZilla by your smart phone or tablet then open your Wi-Fi settings and select the RAPT Wi-Fi Network again to open the RAPT Captive Portal.
5. Select your Wi-Fi network, enter your Wi-Fi password and select **Join**. This will connect your BrewZilla controller to your Wi-Fi network.

If your BrewZilla has been successfully connected to your Wi-Fi network then a Wi-Fi symbol will be present on the top left-hand corner of the BrewZilla display.





### 3. Register your BrewZilla to your Account on the RAPT Cloud

1. Once your BrewZilla controller is connected to your Wi-Fi network enter the settings by pressing **Select** on the controller and select **Register Device**. A **Mac Address** and **Validation Code** will then be displayed on the device. Write both of these down. You will need to enter the MAC address and Validation Code later on the RAPT Cloud to register your device.
2. Log in to the RAPT Portal (<https://app.rapt.io/>) on a device that is connected to the same Wi-Fi network as the BrewZilla controller you are registering.
3. In the RAPT Portal select **Add New Device**. Select **BrewZilla** from the drop down. Select **Next** after ensuring that your BrewZilla Controller is connected to your Wi-Fi network as above.
4. Enter the MAC address and Validation Code when prompted in the required fields, then select **Next**.
5. Congratulations! Your BrewZilla controller is connected to Wi-Fi and registered to your RAPT Portal and your BrewZilla can now be controlled through the RAPT Portal.

### Remote Operation via the RAPT Portal

The brewery can be controlled via a profile generated in the RAPT Portal. Once you have registered your device on the RAPT Portal select **Profiles** and **Create New Profile**. Then add your profile steps such as strike, mash, mash-out, sparge, boil etc. Once you have made your profile then either select **Send Profile to Device** from the profile menu or **Start Profile Session** on the Dashboard to send the profile to your BrewZilla controller. Once the profile has been sent to the device it will automatically energise the device and begin the profile.

You will still need to turn the pump on/off on the controller and adjust the heating power and pump output percentage (if required) manually on the controller.

For instructions to control the brewery manually via the temperature controller including adjusting the set temperature, adjust heating power and pump output percentage then refer to [Operation of the BrewZilla via the Temperature Controller](#).

## Digital Controller Assembly

The BrewZilla Digital Controller is mounted in a position at the top of the boiler with a tilting frame so you can adjust the angle of the screen depending on your height, improving the overall ergonomics of the system.

To mount the Digital Controller onto the boiler, slide the controller onto the bracket using the grooves which are moulded into the rear of the controllers housing.



### Adjusting the Angle of the Digital Controller

To adjust the angle of the screen, loosen the two bolts which hold the bracket in place on the boiler. Then adjust the angle of the bracket to your desired angle and tighten the bolts to hold the bracket in this position.

Tip: if you require a greater angle for the Digital Controller the mounting bracket can be rested on the bolt as shown below to the right.



## Perforated False Bottom Assembly and Installation

The 100L BrewZilla Gen 4.0 includes a perforated false bottom. This false bottom is designed to prevent your pump drawing in more than 95% of solids such as hop pellets. It has NOT been designed so you can place grain directly onto this screen and is not designed to hold the weight of a grain bill. The false bottom adds significantly to the reliable operation of the BrewZilla and it's recommended that this screen is always in place if the pump is going to be used.

The false bottom has legs that suspend it about 14mm above the base of the dome of the boiler so all liquid that exits into the pump or out via the ball valve will be filtered by this screen.

To aid in lifting out the false bottom install the eye bolt assembly, washers and locking nut onto the false bottom. These parts are included in your BrewZilla kit.



**TIP:** For easy removal of the false bottom from the pull up on both the central and outer eye bolts at the same time.




## Boiler Assembly

### Tap Assembly and Installation

The BrewZilla is shipped with the tap assembled but not fitted to the boiler to minimise the risk of damage in transport.


Unscrew the hex nut and retaining nut from the tap. Push the barb with seal into the tap and ensure the silicone seal is on the tap body prior to installation.

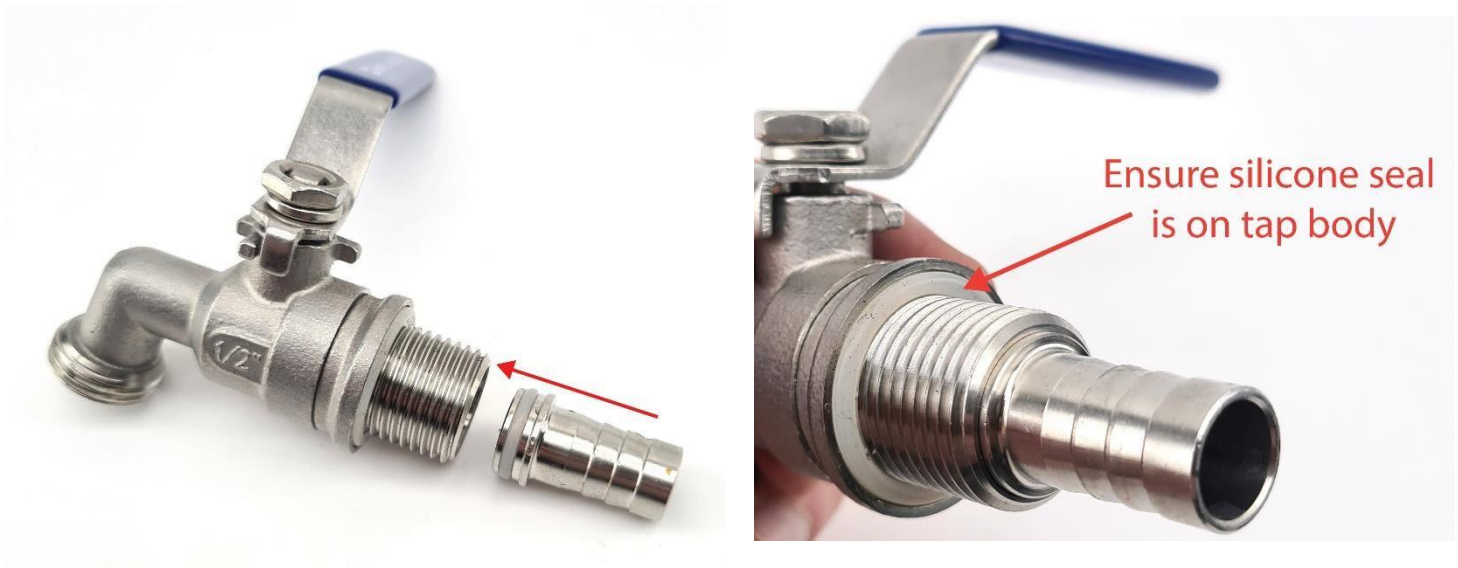

Then turn the BrewZilla upside down and insert the thread of the tap through the pre-drilled hole in the boiler. Secure the tap on the inside of the boiler using the hex nut and secure the barb in place by tightening the retaining nut onto the taps thread.





Push the unconnected silicone hose from the 25W pump over the barb on the tap and secure in place with the wire clamp.

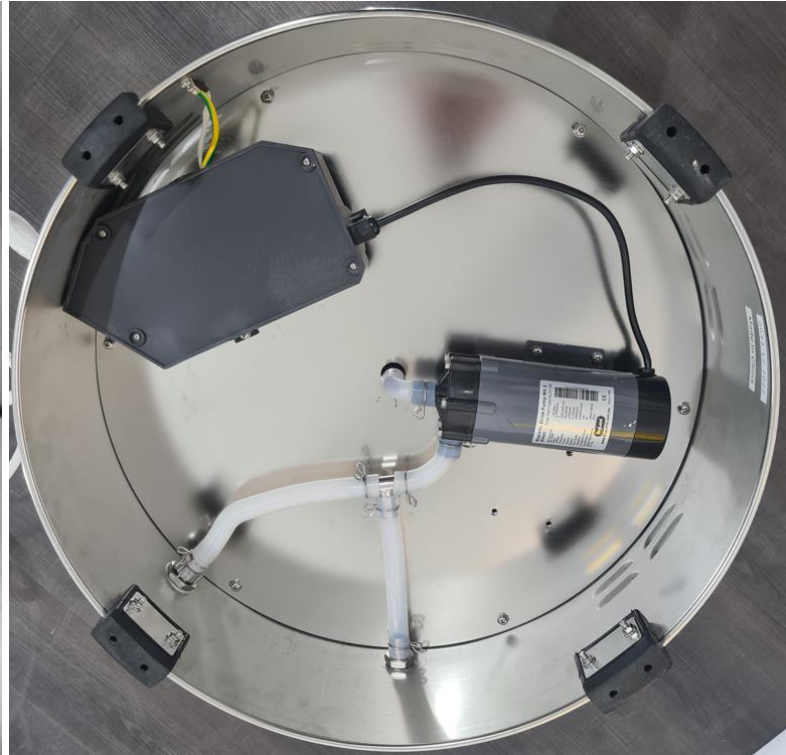

## Plumbing to Tee to the Tap before the 25W Pump

The plumbing on the underside of the BrewZilla Gen 4.0 can be altered so that the wort runs to the tap before it enters the 25W pump. This is handy as it allows the boiler to be drained through the tap even if you have a blockage in the pump. To achieve this, you will first need to move the position of the pump as shown below.

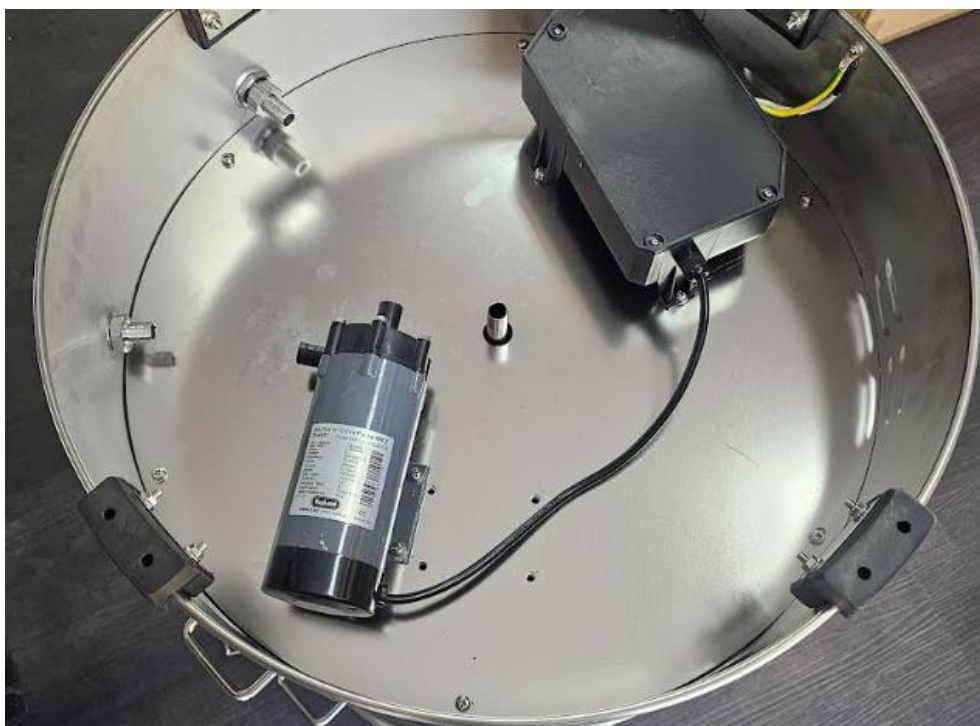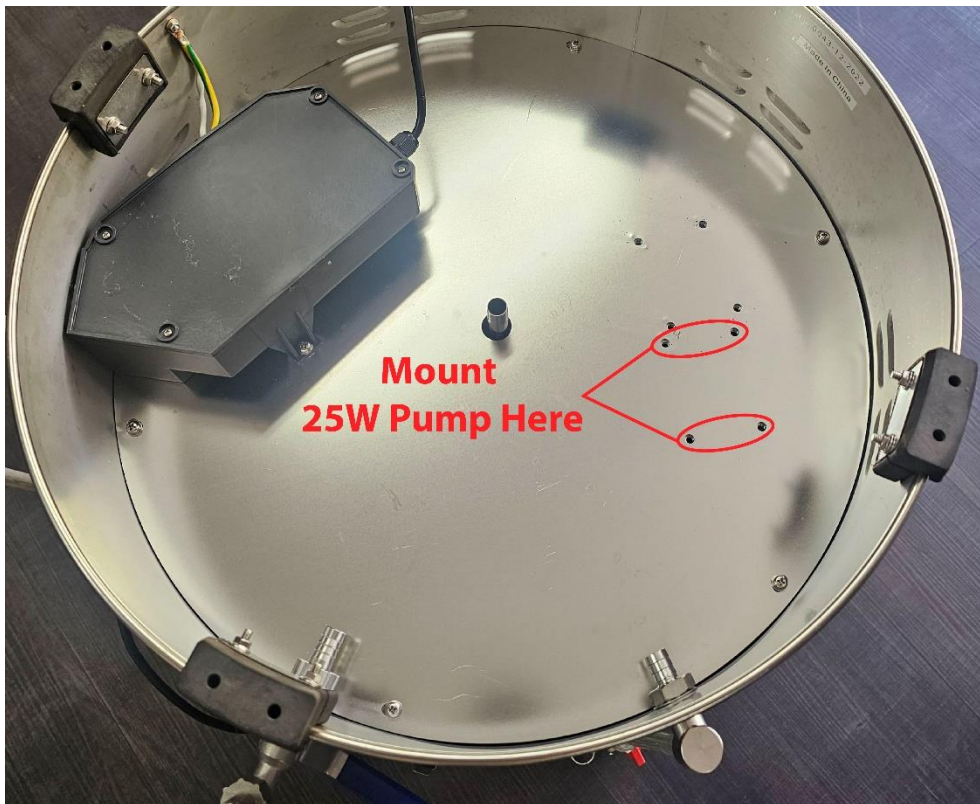

Then change the pipe work as shown below such that the tee piece from the boiler outlet splits to the tap before it reaches the pump inlet.



Make sure there are no kinks or twists in the silicone hosing which could impede the flow of liquid. If a kink is present then this may result in a pressure build up and the hose eventually splitting.

## Malt Pipe Assembly

The malt pipe is the basket which sits inside the boiler and contains your grain during mashing and sparging.

It is made up of the malt pipe body, a perforated bottom screen and a perforated top screen. The BrewZilla gen 4 does not require any overflow pipework and hence the malt pipe bottom and top screens do not have any holes for pipework.

Simply insert the perforated bottom screen into your malt pipe body until it is flush with the bottom of the malt pipe. The perforated top screen is added to the malt pipe after all of your grain has been added to your malt pipe during the mashing step.

Please note: Use of the perforated top screen is optional. The system can be used without it if you prefer to gently stir the mash but it should be reinstalled for sparging to disperse the sparge water and prevent channelling which can reduce your efficiency.





## Fitting the Malt Pipe Handle

We recommend installing the malt pipe handle before you add your grain and malt pipe into your BrewZilla.

To fit the handle, feed one end of the handle through one hole in the malt pipe. Push the handle in on one side far enough so you have enough clearance on the other side to feed the handle into the opposing hole.

Once the handle has been fitted you should then lift the malt pipe using a heavy-duty pulley strap that can handle at least 75kg to account for the weight of the grain in the malt pipe plus water absorption. The KegLand Lift and Lock Pulley Strap ([KL30885](#)) is the ideal pulley for lifting a fully loaded 100L BrewZilla malt pipe.



If you do not have access to a pulley system for lifting the malt pipe then a two-person lift using an appropriately strong bar is recommended to avoid injury.





## Operation of the BrewZilla using the Digital Controller

The Gen 4.0 BrewZilla can be controlled using the buttons on the digital controller or through the RAPT Portal.

If you do not intend to connect your device to the RAPT Portal and hence do not want to utilise the Wi-Fi functionality of the controller you can choose to control the brewery using only the digital controller. To remove the prompts requesting you to register your device to the RAPT Portal you will need to disable the Wi-Fi in the settings of the controller. To do this press select to enter the menu, then select **settings**, then navigate using the arrows to the **Disable Wi-Fi** settings, press select to disable Wi-Fi and the controller will then restart.

### Enable/Disable Graph

By default, the BrewZilla Gen 4.0 controller will display a graph of temperature vs time. If you prefer instead for a numerical old school interface than this can be easily changed by unselecting the **Show graph** checkbox in the **Settings**.

### Adjusting Target Temperature

Press the **Return** button until the Target Temperature is highlighted then use the up or down arrows to change the target temperature. The BrewZilla will only begin heating once the device has been energised by pressing the play button. **Warning: Do not press play to energise the device if there is no liquid in the vessel.**

### Turning the Pump On/Off

Press the pump button to turn the pump on/off. The Pump text will be coloured light blue when the pump is set to ON and coloured grey when set to OFF. The pump will only begin running once the device has been energised by pressing the play button. **Warning: Do not press play to energise the device if there is no liquid in the vessel, this will result in the pump running dry which can damage the pump.**

### Adjusting the Pump Duty Cycle (Percentage)

For greater repeatability of your mash schedule, you can control the pump output by adjusting the duty cycle of the pump rather than using the ball valve on the recirculation arm to adjust the output of the recirculating wort.



To adjust the duty cycle of the pump, press the **Return** button until the pump percentage is highlighted then use the up or down arrows to change the pump percentage. If the pump percentage is reduced then the pump will cycle on/off to reduce the output.

Alternatively, you can hold the pump button while pressing the up or down arrows to adjust the duty cycle.

**Important: to minimise the risk of blocking the pump, always have the top screen in place when recirculating wort during the mash**

### **Adjusting the heating power**

Press the **Return** button until the Heat percentage is highlighted then use the up or down arrows to change the heating power.

If you have PID disabled then it is best to set the heating power to between 30-40% during the mash to stop the temperature overshooting your set temperature.



## Mashing

Once you have assembled your boiler, digital controller and malt pipe you are then ready to add grains to begin mashing.

Ensure that you have added the correct volume of strike water and this water is heated up to the correct strike temperature according to your recipe. Generally, the strike temperature is a few degrees Celsius above your desired mash temperature.

Then add your malt pipe with the bottom perforated screen installed into your boiler, such that the top lip of the malt pipe rests on the wire supports which are nested in the groove at the top of the boiler.

You can then pour your grain into the malt pipe. The malt pipe is designed to take up to 25kg grain but in the majority of recipes you will probably only use 20-23kg.

It is best to stir the grain periodically while pouring it into your malt pipe to break up any dough balls (dry spots). Once you have added all the grain thoroughly stir the grain to ensure all the dough balls have been broken up. This will take about 2-5 minutes.

Then insert the top screen into the malt pipe so that it lightly rests on top of the grain. After all the grain has been stirred in and the top screen inserted, you can then [assemble the recirculation arm](#) to recirculate the wort during the mash.

You may find that the temperature may overshoot the target temperature if the heating power is set to 100%. To maintain a more stable mash temperature, [reduce the heating power](#) to between 30-40%. However, the exact power setting is dependent on a number of variables such as your grain bill, whether your unit is jacketed and heat loss from the system for example so the exact required power can vary.

## Recirculation Arm Assembly

**WARNING: The recirculation arm must be fitted whenever the pump is in use.**

**WARNING: Do not rotate the recirculation arm while the camlock is engaged.**

Recirculation assists in achieving high mash efficiency using your system as it aids in producing a homogenous mixture ensuring the temperature is even throughout the grain bed.

Before attaching your recirculation arm, please check to see if the silicone washer is in place in the female camlock. If this seal has rattled loose or fallen off, the male and female camlocks will not make a good seal and it will leak when the pump is in use.

To fit the recirculation arm to the BrewZilla, lift the arms on the female camlock, then insert the male camlock and engage the female camlock into its locked position.

If you need to rotate the recirculation arm for any reason, please switch off the pump and readjust the camlock to the position required and then reengage the camlock into its locked position before turning the pump back on.

***Important: If you are mashing without the top perforated in place in the malt pipe then always make sure to elevate the silicone hose from the recirculation arm above the grain bed if running a [pump duty cycle](#) below 100% and before turning the pump off. This prevents grain being sucked back up the recirculation arm and back into the pump when suction is generated when the pump is cycled off.***




## Mash Temperature Reading

The temperature on the digital controller reads the temperature at the bottom of the boiler near where the elements are mounted. It is important to understand that this is not the core temperature of the mash. If you recirculate long enough the mash temperature will eventually be close to the measured temperature displayed on the digital controller. With that said if you want to increase the temperature of the mash it is normally fastest and easiest to overshoot the desired mash temperature by a few degrees while using a secondary calibrated thermometer in the mash to keep an eye on the core temperature of the mash.

If you are finding that you are overshooting your target temperature during the mash for example, then [adjust your heating power](#).

The photo to the right shows the placement of the probe. The probe placement has been designed like this as it prevents the element from overheating and scorching the wort by taking the temperature of the wort closest to the elements. This is why your strike temperature needs to be accurate!

The BrewZilla includes Ultra Low Watt Density Elements (ULWD) meaning brighter beer can be brewed without the fear of scorching and burnt off flavours.

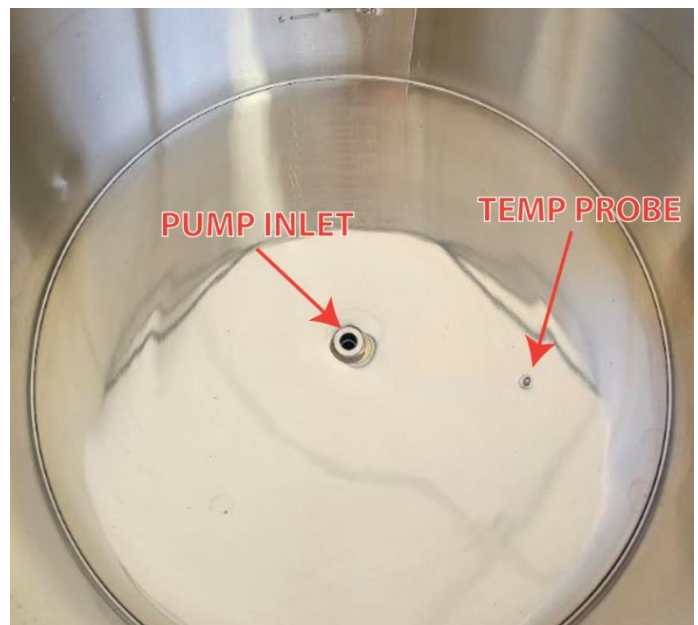

For the best possible accuracy and control of the mash process and temperature, the use of a RAPT Bluetooth Probe is recommended. This allows the temperature to be measured directly from the mash.

## Sparging

Once you have mashed your grain for 60-90 minutes it's then time to sparge the grain.

Sparging involves rinsing the grain bed with warm water to extract as much sugar as possible without extracting undesirable tannins.

Using the malt pipe handle lift the malt pipe out of the boiler and rotate 90 degrees until you see the feet of the malt pipe located near the halo ring (wire supports). See picture below.

The Gen 4 BrewZilla includes a two-stage malt pipe. This gives you the option to lift the malt pipe half way up and support it on the halo ring. This makes it more ergonomic, making it easier to lift the heavy malt pipe out of the liquid. If you are making smaller batches only raising the malt pipe up halfway may be preferable.

It is advised to have the top screen inserted into the malt pipe during sparge to prevent channelling through the grain bed which can reduce your efficiency





Once the malt pipe is suspended above the boiler and is securely supported by the halo ring then pour warm water (approximately 75-80°C) onto the top screen inside the malt pipe to rinse the grain of the majority of the remaining sugars. This process will probably require 40-50 Litres of water depending on your recipe and desired gravity that you are trying to achieve.

We highly recommend a secondary vessel to hold hot/warm water for this process such as a [65L Digiboil](#). If not, hot water directly from your faucet will do.





## Boiling

Boiling is one of the final steps of making beer in the BrewZilla. Simply set the [heating power](#) to 100% and [set the target temperature](#) to over 100C which will result in the elements remaining on continuously. If you set the controller to 100C you may find that the elements turn off for a brief period once this temperature is hit. Ideally you want the elements to run at full power during the entirety of the boil.

Once you have reached a boil make your hop additions and boil as long as required as per your recipe. A normal boil length is 60 minutes however this can vary between beer styles.

### Boil Temperature Reading

At sea level water will boil at 100°C. If a temperature of above 100°C is displayed on the controller while the wort is boiling then you will need to [calibrate your temperature probe](#).

If a temperature below 100°C is displayed on the controller while the wort is boiling and you are at sea level then you will need to [calibrate your temperature probe](#).

Water at a temperature less than 100°C at altitudes above sea level. So, if your wort is boiling below 100°C and you are at a high altitude then correlate the displayed temperature with the boiling point of water at your elevation to determine if calibration is required.

## Cooling

We would advise a high throughput chiller for cooling your wort down to pitching temps after the boiling step such as the [½ BSPT Coolossus Stainless Steel Counter Flow Chiller](#) or [1.5 Inch Tri-Clover Coolossus Stainless Steel Counter Flow Chiler](#).

## Hot Cubing

Another great method of cooling your wort that saves time is hot cubing. If you fill a HDPE Cube or HDPE Bladder with hot wort then quickly fit the lid, this will keep your wort in a sanitary environment. If you use this method, make sure to purge air out of the cube / bladder and then simply leave it at ambient temperature for 24 hours to cool down (preferably out of direct sunlight).

**20L**

## Cleaning

### Cleaning after brew day

The Gen 4.0 BrewZilla has a domed bottom with a centralised pump inlet. This makes it easy to drain all liquid from the brewery at the end of your brew day simply by opening the tap. After the liquid has been drain then rinse to remove any trub from the boiler. You may find tipping the unit upside down will do a better job at getting all this trub out of the boiler.

Then fill your brewery up with water and an approved cleaner such as [StellarClean](#) according to the instructions on the package. Set the temperature on the boiler to 55°C and attach the camlock recirculation arm. Then select play on the device to energise it and recirculate this cleaner for 10 minutes using the pump, particulates on the wall of the brewery can be removed using a sponge or cloth. Then turn the pump off and connect your chiller (if required) and recirculate through the chiller for another 5 minutes.

Then the pause button to turn the elements and pump off, empty the cleaning liquid and rinse the brewery using a hose or fill with clean water. Attach the recirculation arm and press play to reenergise the device and run the pump to rinse the recirculation arm and repat with your chiller (if required).

After it has been rinsed, empty this water and then fill again with water and an approved sanitiser such as [StellarSan](#) according to the package instructions. Acidic sanitisers such as



StellarSan assists with dissolving minerals which produce beer stone and also helps to passivate the stainless steel. Recirculate this StellarSan solution through the camlock recirculation arm and the chiller (if required). The StellarSan solution can then be emptied ready for the next brew day, it does not require rinsing.

## **Pump Cleaning and Maintenance**

Generally, the pump does not require disassembly after each brew day, simply recirculating cleaner and sanitiser through it will break down and dissolve any proteins, minerals or contaminants present in the pump.

The pump on the Gen 4.0 BrewZilla is easily accessible by simply flipping the brewery over if you decide you wanted to perform a thorough clean or your pump happens to become stuck.

If you have a blocked pump you may need to disassemble the pump. To Disassemble the pump, detach all hosing first and then unscrew the pump from the brewery. Then remove the screws that hold the pump head on and check the pump head for debris and or solids that could be stuck in the pump head. Remove the impeller and check if for damage or any blockage that could be stopping it from spinning. Look in the impeller housing and confirm no blockages are within this housing.

**NOTE: Never direct a garden hose down the pump inlet or recirculation arm as this can result in the silicone hosing rupturing due to the high pressure of mains water.**



## Troubleshooting Registration and Telemetry

### This Device Is Not Recognised Error

This can be caused by trying to register when the BrewZilla has an older or outdated firmware. Please select **Check For OTA Update** in the Settings menu and try again once the firmware update is complete.

Note: If the firmware is very out of date this may need to be updated more than once.

This can be caused by a timeout during registration. Reboot the BrewZilla by unplugging it for 60 seconds. Log out of the RAPT Portal and log back in, then try again.

### No telemetry is being displayed on the RAPT Portal.

If you are experiencing issues receiving telemetry or sending a profile to your BrewZilla from the RAPT portal then you should first check that your BrewZilla controller is connected to your Wi-Fi network.

Determine whether your BrewZilla is connected to Wi-Fi and check the signal strength

To check your BrewZilla Gen 4.0 controller is connected to your Wi-Fi network with good signal strength press 'Select' and navigate to the **Settings** and then **Diagnostics**.

The Wi-Fi strength will be displayed in this Diagnostics menu and the Wi-Fi network which the controller is connected to will be shown next to wifi AP.

Signal strength is represented on a scale of 0 to -100dbm

Signal Strength (dBm)	What it means
0 to -30dBm	Maximum signal
-50dBm	Excellent signal
-67dBm	Good, reliable signal
-70dBm	Ok, not a strong signal
-80dBm	Poor, unreliable signal
-90dBm	Unusable

### Re-register your BrewZilla Controller

If your BrewZilla controller is still not sending telemetry to the RAPT Portal or you are unable to remotely start a profile despite being connected to Wi-Fi with a good, reliable signal strength then you may need to re-register your BrewZilla controller to your



account. To re-register your BrewZilla controller do not delete the device from the RAPT Portal, instead follow the steps below:

1. On your BrewZilla controller, enter the **Settings Menu** and then navigate to **Clear Registration** and press **Select** to clear the device registration
2. Open the RAPT Portal (<https://app.rapt.io/>) and click on the edit button of the BrewZilla controller you wish to re-register
3. Go to the **Troubleshooting** tab and select the **Reset Device Authentication** button
4. When prompted, enter the new Validation Code that is generated on the BrewZilla Controller and click **Save**. Your BrewZilla should now be registered successfully

## The BrewZilla Controller has been sending telemetry but is no longer sending telemetry

This can occur for a number of reasons:

- Check that the BrewZilla is still connected to your Wi-Fi network.
- Check that the BrewZilla is within range of the Wi-Fi router.
- There may be an interruption to the network or internet.
- There may be a Wi-Fi connectivity issue caused by unusual network setups or network security settings.

If you are still experiencing issues, please contact [beer@kegland.com.au](mailto:beer@kegland.com.au) for further assistance

## Updating Firmware

Your BrewZilla will automatically check for and install firmware updates when powered on and connected to Wi-Fi.

To check the latest firmware version installed on your device press **Select** and enter the **Settings** menu. Then navigate to **Diagnostics** and the installed firmware version (**ver**) will be displayed.

To manually perform a firmware update press **Select** on the device and enter the **Settings** menu. Then navigate to the **Check for OTA Update** and press **Select**.



## Temperature Probe Calibration

If you find that your temperature probe is not reading the correct temperature for example if is reading over 100°C when boiling at sea level then a 2-point calibration can be performed.

To calibrate the built in temperature probe enter the **Settings** menu and **select Calibrate Point 1**. Then fill your boiler with ice water and measure the temperature of the water using a calibration thermometer. Wait for the ADC reading to stabilise as much as possible and input the measured temperature of Calibration point 1 by using the up or down arrows. Then press **Select** to set the temperature and ADC reading of Calibration point 1.

Next, select **Calibration Point 2**. Empty the boiler and fill with hot or boiling water. Wait for the ADC reading to stabilise as much as possible and input the measured temperature of Calibration point 2 by using the up or down arrows. Then press **Select** to set the temperature and ADC reading of Calibration point 2.

Your brewery should then be calibrated.

To reset back to default values please refer to the [Settings](#) menu.





Please note if you are above sea level you may find that water reaches a boil before 100°C and if this occurs calibration may not be required. Refer to the boiling point of water at your elevation.

## PID Temperature Control

The Gen 4.0 BrewZilla includes a setting to enable PID Temperature Control. The default settings for the PID coefficients are shown in the Default Settings table. These coefficients should work well to maintain the mash and boil temperature of a batch with fermenter volume of 85L.

If you brewing a different fermenter volume such as a small batch or a very high gravity beer with a large weight of grain you may need to tune these PID coefficients to according to your specific batch specifications.

## Display Icons Legend

ICON	MEANING
	Heating Relay On
	Wi-Fi Signal Strength
	Bluetooth Enabled
	PID Enabled


## Profiles

Profiles are a key component of the RAPT system. Profiles are powerful tools that can be customised to a great degree, allowing extremely fine control over all aspects of brewing/fermentation.

Profiles can be designed in the RAPT Portal. There are also Global Profiles that can be imported and customised. Once a profile is created in the RAPT Portal, it can be sent to the corresponding RAPT device using the “Send Profile To Device” option in the RAPT Portal. The RAPT ecosystem is intended to be largely controlled remotely, and thus there are more powerful controls in the RAPT Portal.

To start or amend a profile that has been uploaded to the RAPT device select PROFILES from the main menu

This will display the currently selected profile. If no profile is running, any profile that has previously been sent to the RAPT device can be selected and started from this screen.

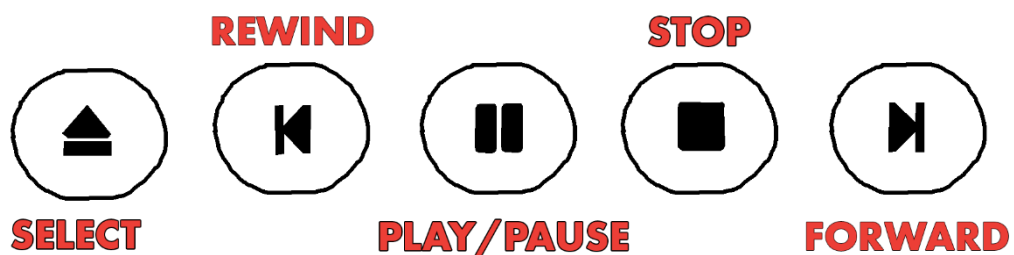





When a profile is active it can be paused, cancelled or manually moved forward or backwards using the on-screen display. The **Select** icon allows you to select another (previously uploaded profile). **Rewind** and **Forward** allow you to move forward or backwards along the profile.

**Play/Pause** allows you to pause or resume the active profile. **Stop** will stop the current profile.

Manual alterations to the current profile will also be reflected in the RAPT portal after a short interval.

To access the Menus, press the Enter key then scroll down to desired menu. Press Enter to access the menu.



## Menus

### Register Device

This option will only be available when the RAPT Gen 4 BrewZilla is *not* registered to the RAPT Portal ([app.rapt.io](http://app.rapt.io))

Please refer to [Registering your BrewZilla to the RAPT Portal](#) for full step by step instructions on registering your RAPT Gen 4 BrewZilla.

### Start Profile/Profile Control

The selections available in this menu will change depending on:

- 1: If there are any profiles stored on the RAPT Gen 4 BrewZilla
- 2: If there is an active profile running
- 3: If there is no profile running

In this menu you can manually select and start any profiles that are stored in the device. The RAPT Gen 4 BrewZilla will automatically detect and download any changes to stored profiles before starting the profile.



## Settings

The following options are available in the Settings Menu.

SETTING	PARAMETER
Temperature Sensor	Built-In or select any Bonded Bluetooth RAPT Thermometer
Show Graph	Toggles display between the graph or a numerical display
Unit System	Toggles between metric or imperial data
Zoom Level	Select the time range displayed on the graph
Heating Hysteresis	Sets the heating hysteresis (Range 0.0°C-10°C, default 1°C)
Heater Enabled	Toggles heating on or off (when unchecked, the elements will not operate irrespective of other settings)
Bluetooth Enabled	Toggles Bluetooth functionality on or off
Allowed Sensor Diff.	This sets the allowed temperature differential between the built in probe and the current setpoint (when using a Bluetooth device for temperature control) (Default 2°C)
Sensor Timeout	Sets the timeout if a Bluetooth device drops out (reverts to internal probe – default 130 secs)
Sounds Enabled	Toggles device sounds on or off
Calibration point 1	1st calibration point – default value 1°C
Calibration point 2	2nd calibration point – default value 100°C
Forget calibration	Reverts manual calibration back to default settings
NTC beta	Enter the NTC Beta of an external temp. probe. The default is 3950
NTC Ref. Temperature	Enter the NTC Ref. Temperature of an external temp. probe. The default is 298.2
NTC Ref. Resistance	Enter the NTC Ref. Resistance of an external temp. probe. The default is 100000
Relay Cycle Time	Sets the allowed relay cycle time (Range 5-3600 seconds, default 5 seconds)
PID Heating	Toggles PID heating on or off (recommended for advanced users only)
PID P Coefficient	Enter desired proportional PID coefficient (default 0.250)
PID I Coefficient	Enter desired integral PID coefficient (default 0.0100)
PID D Coefficient	Enter desired derivative PID coefficient (default 0.0750)
Forget WiFi Config	Forgets existing WiFi config
Disable/Enable WiFi	Disables or Enables WiFi (if you wish to not use the RAPT Portal)
Clear Registration	Clears RAPT Portal registration (see Troubleshooting)
Low Temp. Alarm	This is the temperature below which an alarm will sound (default -10°C)
High Temp. Alarm	This is the temperature above which an alarm will sound (default 110°C)
Check For OTA Update	Manually check and download any available firmware updates



To change any of the advanced settings enter the **Menu** by pressing select (↵). Once in the menu navigate to **Settings** and press select (↵).

Navigate to the advanced setting you need to adjust and press select (↵) on this setting. Then use the Up or Down arrow to adjust the set value for the setting.

## Bluetooth

Bluetooth needs to first be enabled in the Settings menu (above).

In this menu you will see a list of compatible Bluetooth enabled RAPT devices.

To **Bond** a Bluetooth enabled RAPT devices, use the arrow buttons to scroll to select the device. Choose Select (↵) to Bond the device, or Return to cancel.

Once Bonded, the device will be visible in the Bonded section of the Bluetooth Menu. To Unbond, select the device with the navigation arrows and choose Select (↵) to Unbond, or Return to cancel.

Once the device is Bonded, it can be selected in the Settings menu option as one of the available **Temperature Sensors**. Once selected in this menu, temperature control will be ceded to the selected Bluetooth enabled RAPT device, rather than the internal temperature probe.

The temperature of the internal probe will also be displayed.

**NOTE:** It is completely normal for there to be a temperature variance between the built in probe and the Bluetooth enabled RAPT probe. This is because the Bluetooth probe is directly measuring the temperature of the mash, and the built in probe is measuring the temperature from the probe mounted close to the elements of the RAPT Gen 4 BrewZilla.

The Allowed Sensor Differential sets the allowed temperature differential between the desired *setpoint* and the *current* temperature of the *built in probe*. Heating is disabled temporarily if this differential is exceeded. The default differential setting is 2°C.



This differential can be altered in the Settings Menu. If the temperature differential is exceeded, the RAPT Gen 4 BrewZilla will suspend heating until the differential is reduced. The legend DIFF OVERRIDE will also be displayed when the display is in Graph Disabled Mode.

The RAPT Gen 4 BrewZilla will suspend active heating and resume as needed – no intervention is required. Once the differential is reduced then heating will continue as normal.

It is possible to leverage these settings in conjunction with the [RAPT Bluetooth Thermometer](#) to maintain extremely fine control over every aspect of the brewing process.

With most all in one breweries, temperature is controlled through a built in temperature probe, typically on the base of the boiler. Thus, there will generally be a temperature gradient throughout the mash. If the brewer wishes to raise the temperature of the mash then this can take quite a long time due to heat losses etc.

For a typical mash, setting a small Allowed Sensor Differential when *maintaining* temperature, and a higher Allowed Sensor Differential when *raising* mash temperature will allow for faster transitions between mash steps and finer temperature control when the desired temperature is achieved. Combining this with the very fine control over power settings makes it possible to achieve accurate and responsive mash temperature control throughout the brewing process.

Using advanced Profiles in the RAPT Portal allows this powerful control to be almost entirely automated.

## Diagnostics

The Diagnostics menu contains information about the RAPT Gen 4 BrewZilla. This includes such information as current firmware version, Wi-Fi network and signal strength, MAC address and IP address of the device.

## Recommended Accessories

### RAPT Bluetooth Thermometer

The new Bluetooth thermometer can connect up to your BrewZilla Gen 4, RAPT Temperature Controller, RAPT Fermentation Chamber and log that temperature data and manipulate fermentation/brewing and distillation profiles in the RAPT Portal (<https://app.rapt.io/>). This greatly reduces the need for handwritten records of your brew day as it's all done automatically. The RAPT portal also allows you to see every brew you have done in the past with logged temperatures from the main units probe and this digital thermometer. This unit can also be setup to get push notifications to your mobile phone of when to sparge for example.



Along with this ease of access and control. The RAPT BrewZilla will also allow you to fully customise your brewday with profiles specifically tuned to your style of brewing or your recipe.

([Part No. KL24334](#))

### 100L BrewZilla Heat Exchanger Dish (HED)

The [Heat Exchanger Dish \(HED\)](#) is an optional upgrade that can be installed onto the perforated false bottom screen. This functions to redirect the flow of wort allowing more contact time with the concealed concave elements resulting faster heating times.

([Part No. KL29377](#))



## Heavy Duty Dolly Bundle

A movable dolly is highly recommended if you are using a Lift-N-Lock Pulley system for lifting your malt pipe to move the brewery into the exact spot that you need and lift away!

The feet of the 100L BrewZilla slots into the grooves on the dolly plate to make moving your brewery around a breeze. Lock your brewery in place with the two-locking wheels.

([Part No. KB15697](#))



## Neoprene Jacket / Parka (with recirc arm cover)

If you brew where it is cold or windy a neoprene jacket is a must-buy to help speed up heating times and maintain mash temperature with ease. Don't lose that heat to the atmosphere!

([Part No. KL24389](#))



## TC Breakdown – 3 Inch Tri-Clover – Conversion Kit for 25W Pump

Upgrade your 25W pump with a [tri-clover pump head](#) upgrade.

This pump head eliminates cavitation and is designed to be able to be removed easily and quickly without any tools so whip the head off in a flash to clear out spent grain, hop material or a blockage.

([Part No. KL27267](#))



## Silicone Tubing

Silicone tubing is great for transferring the wort from the BrewZilla unit to your fermenter or into a hot cube. We recommend heavy duty silicone tubing with 12.5mm ID and 18.5mm OD. This Silicone tubing is plasticiser free so there is no BPA. It's also suitable for temperatures up to 200C so it's suitable for the transfer of hot wort. Unfortunately, silicone tubing is more expensive than vinyl (PVC) tubing however it's better suited for this application.


([Part No. KL06873](#))



## StellarClean

(Powerful Brewery Wash - PBW) is a buffered alkaline detergent that has been proven to be more than an effective substitute for caustic soda cleaners. Because of its unique formulation of buffers and mild alkalis, it is safe on skin as well as soft metals such as stainless steel, aluminium, and on plastics. StellarClean uses active oxygen to penetrate carbon or protein soils and is not affected by hard water. Works best in warm to hot water. It will require to be rinsed with the same temperature water after cleaning is finished.

([Part No. KL05494](#))



## StellarSan

Phosphoric Acid Blend Sanitiser can be used to passivate the internals of the BrewZilla back to their original shiny finish. We recommend applying some undiluted to a rag, rubbing the internals. Leave for 30 minutes and rinse with cold water thoroughly until the foam subsides. You do not need to sterilize your BrewZilla prior to use, as the boiling action of the vessel will kill any harmful bacteria. But can be done to ensure the upkeep of the stainless steel is





as protected as possible.

It is also a great brewery sanitizer for any of your equipment that comes into contact with fermented beer. E.G mash paddle if you're adding gelatin / dextrose for clarifying / priming and stirring the vessel.

([Part No. KL05494](#))

### Heavy Duty Stainless Mash Paddle

These long handled stainless mash paddle. Ideal for removing dough balls and aid in equalising the heat of the mash from stirring.



([Part No. KL03797](#))

### Refractometer with Light

A refractometer is a fantastic tool to take instant gravity readings of hot wort. This tool will help you optimize your sparging. If you want to collect the maximum sugars from your malt pipe you can keep sparging in the malt pipe until the wort falling from the underside of the malt pipe reaches 1.010. This tool is the hydrometers as they give a having to calibrate the reading based on the temperature of the wort.

**EXTRA LONG  
HEAVY DUTY GLOVES**



**Now With LED**

**Handy Light**



significantly better than  
faster reading without

([Part No. KL07344](#))

### Extra Long Heavy Duty Brewery Cleaning Gloves

These heavy-duty gloves are great for handling chemicals, and also for grabbing items covered in hot wort. They have long sleeves on them and are perfect for brewing with. ([Part No. KL05289](#))

### Hop Scales / Brewing Salt Scales

Measuring small amounts of hops for your brew can be quite hard without the necessary tools. The same goes for measuring even smaller amounts of brewing salts. We highly recommend some jewellery scales to make these measurements easy.

([Part No. KL20114](#))



### A BrewFather Subscription

If there is one thing a lot of homebrewers can't go without, it is brewing software to find recipe inspiration, create your own recipes, water chemistry, brewing calculators and enough bells and whistles to log each step of your brewday with your added notes.

([Part No. brewfather-subscription](#))





## Intermediate / Advanced Users Accessories

### 65L DigiBoil Hot Liquor Tank (HLT)

Primarily used for sparging purposes. Using an HLT will allow you to rinse your mash in the raised position with 76°C to 80°C water.

Washing those sweet sugary morsels off the malted grain and into the boiler. Using a 5L Jug and gloves usually does the trick.

*We picture it like washing your hands that are covered in toffee, yes, you'll get it off with cold water. But it will come off faster and use less water if it was warm.*

*#showerthought*

[\(Part No. KL07313\)](#)



### Digital pH Meter

If you have come this far into the manual, you're wanting the most out of brewing. Knowing each individual detail of your brew and how to make it better. One major part of brewing is mash pH and for some brewers its final pH before and after fermentation. Especially if making sour beers.

[\(Part No. KL04169\)](#)



## Phosphoric Acid 85%

Adjusting your pH in conjunction with the pH Meter and perhaps BrewFather / Brewing Calculators to know how much to add. Phosphoric acid is our preferred means of acidifying pH in the brewing process.

([Part No. KL05364](#))



## Reverse Osmosis Filter

For those deep down the rabbit hole and want to start with a blank canvas. Or simply your water supply changes in flavour / mineral concentration constantly. Having a supply of fresh Reverse Osmosis water or filtered yourself is a great asset to repeatable quality brewing. ([Part No. KL15141](#))





**Also Compatible with**

**alcoengine**

### **Distillation Accessories**

#### **100L Pro Sight Glass Distillation Lid for BrewZilla100L**

Make beer and spirits! with this handy attachment you will be able to fit an AlcoEngine Pot or Reflux still to your BrewZilla 100L or DigiBoil 100L.

([Part No. KL25836](#))

#### **AlcoEngine Pot Still**

A pure pot still is used when you want the flavour of the wash to come through. For instance, if you ferment fruit or grains, it will allow some of that flavour to enter your distillate.

If you use a reflux still, you would just end up with pure, unflavoured vodka. Inject some flavour into your drinks with the AlcoEngine Distilling Pot Still!

With an all-copper construction for smoothness of taste it comes with a digital thermometer and is simple to use.

([Part No. KL04633](#))





### **AlcoEngine Reflux Still**

With its easy-to-use operation, amazing features, and rock-solid reliability, the Spirit Maker is the foundation of Pure Neutral Alcohol Distilling. Even as our competitors try to catch up, the technologies and features built into this design keep our homemade alcohol distiller years ahead of the DIY home distilling trend.

### ***Easiest Still to Use - That's our guarantee***

This bulletproof design is so easy to use that we are giving you a guarantee that you will get great spirit in no time flat. All you need to do is make sure you have adequate water/coolant flowing through the head and just about everything else will look after itself.

([Part No. KL04640](#))



## Support

Please join the RAPT Users Group and KegLand Home Brew Community Group Facebook pages for support on how to use your BrewZilla, recipes or tips and tricks. If you need hardware support, please contact your nearest BrewZilla distributor.

## Warranty (Australia)

The BrewZilla 35L & 65L Generation 4.0 comes with a 3 Year Warranty when sold in Australia.

To lodge a warranty, claim in Australia please forward as many visual pieces of supporting information and a detailed description of your issue to [beer@kegland.com.au](mailto:beer@kegland.com.au)

If you purchased your unit from an international distributor, you will be required to go through their warranty claims process.

*For full terms and conditions, please visit our website here -> [Terms & Conditions](#)*